



Mirafi® PGM-G Composite Paving Grid

OUR COMPANY

TenCate® develops and produces materials that function to increase performance, reduce costs and deliver measurable results by working with our customers to provide advanced solutions.

OUR PRODUCT

Mirafi® PGM-G is a glass filament reinforced paving composite comprised of fiberglass filament yarn incorporated into a nonwoven polypropylene paving fabric. This composite or reinforced paving fabric combines the excellent reinforcing properties of glass filaments with optimum liquid asphalt retention capacity of a mechanically bonded AASHTO nonwoven paving fabric.

The Difference Mirafi® PGM-G Paving Composite Makes:

- Reinforcement: High load-properties at low strain (<3%) appropriate for heavy loaded pavements.
- Cost Effectiveness: Suitable for full width overlay, local patch and joint repair.
- Sealing: Moisture cannot penetrate into the road structure.
- Longevity: Maintenance intervals are considerably extended.

- Stress Relief: Retards crack propagation from the old surface to the new overlay.
- Adhesive Bonding: Provides uniform bonding between old and new asphalt layers.
- Installation: Easily included in asphalt resurfacing projects.
- Recycling: Can be milled with conventional milling machines.
- Resistance: Chemically resistant to road salt.


OUR APPLICATIONS

Mirafi® PGM-G paving composite is used for the maintenance of asphalt and concrete roads.

Mirafi® PGM-G paving composite is ideal for:

- Asphalt reinforcement of full pavement width
- Asphalt reinforcement of old concrete roads
- Repair of a longitudinal crack
- Repair of the old surface over excavated ditches

Constant increases in traffic frequency and axle loads place great demands on existing roads. The horizontal stresses induced between layers soon result in crack formation, and any local differential settlements also lead to cracking of the asphalt layer.

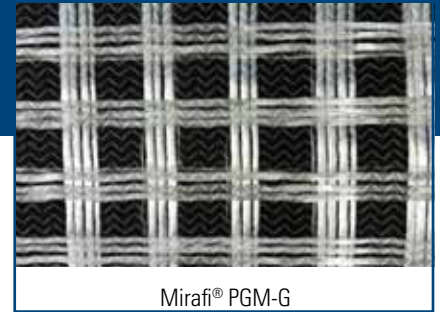

Mirafi® PGM-G

Mirafi® PGM-G is the solution for pavement engineers. Asphalt reinforcement by high-modulus glass filaments, combined with the sealing and uniform bonding effect of the nonwoven geotextile, provides effective maintenance and prolongs the working life of road structure.

OUR PROCESS

Mirafi® PGM-G composite is a reinforced paving interlayer with high strength, low elongation and high asphalt absorption. When installed with sufficient asphalt cement tack coat on a properly prepared surface, Mirafi® PGM-G composite and the tack coat form an impermeable interlayer system that is fully recyclable and adds long-term lifecycle cost benefits to your pavement.

OUR SERVICE

TenCate® offers complete application technical assistance. Our comprehensive service includes assistance during design, specification and throughout the process. TenCate® makes the difference.



Mirafi® PGM-G Composite Paving Grid

Technical Data (All values are minimum average roll values)

Mechanical Properties	Test Method	Units	PGM-G 50/50	PGM-G 100/100
Tensile Strength @ 0°	ASTM D6637	lbs/in	342 (60)	655 (115)
Tensile Strength @ 90°	Method A	(kN/m)	380 (67)	655 (115)
Tensile Elongation	modified	%	< 4	< 3
Melting Point	ASTM D276	F° (C°)	Glass filaments are incombustible and temperature resistant up to 752° (400°)	
Asphalt Retention	ASTM D6140	gal/yd² (l/m²)	0.27 (1.2)	0.27 (1.2)
Mass/Unit Area	ASTM D5261	oz/yd² (g/m²)	12.9 (436)	20.0 (678)
Glass by Weight		%	64.2	77.4

Tensile Strength values refer to strength of the glass filaments.

Physical Properties	Unit	PGM-G50/50	PGM-G100/100
Grid Aperture Size	in (mm)	1.26 (32)	1.5 (38.1)
Roll Dimensions (width x length)	ft (m)	12.5 x 150 (3.8 x 45.7)	6.25 x 300 (1.9 x 91)
Roll Area	ft (m)		12.5 x 150 (3.8 x 45.7)
Estimated Roll Weight	yd² (m²)	208 (174)	208 (174)
	lbs (kg)	168 (76)	260 (169)

TenCate® Geosynthetics Americas does not assume liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate® Geosynthetics Americas disclaims any and all express, implied, statutory standards, warranties, guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Mirafi® is a registered trademark of Nicolon Corporation.

© 2013 TenCate Geosynthetics North America

PDS.PGMG0613

365 South Holland Drive Tel 800 685 9990 Fax 706 693 4400
Pendergrass, GA 30567 Tel 706 693 2226 www.mirafi.com



 materials that make a difference