


PETROMAT MPG⁴

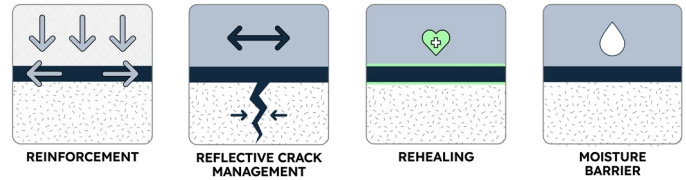

PETROMAT® MPG⁴ is a 100% polypropylene filament nonwoven fabric, reinforced by mechanically bonded multi-axial network of reinforcing glass filaments. PETROMAT MPG⁴ was especially developed for the rehabilitation of asphalt roads.

TenCate Geosynthetics Americas Laboratories are accredited by Geosynthetic Accreditation Institute – Laboratory Accreditation Program ([GAI-LAP](#)).

MECHANICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM AVERAGE ROLL VALUE
Tensile Strength @ 0°	ASTM 6637 A modified	lbs/in (kN/m)	345 (60)
Tensile Strength @ 90°	ASTM 6637 A modified	lbs/in (kN/m)	345 (60)
Tensile Strength @ 45°	ASTM 6637 A modified	lbs/in (kN/m)	345 (60)
Tensile Strength @ -45°	ASTM 6637 A modified	lbs/in (kN/m)	345 (60)
Tensile Elongation	ASTM 6637 A modified	%	<5

			MINIMUM TEST VALUE	
Melting Point ¹	ASTM D276	F° (C°)	1472°	(800°)
Asphalt Retention	ASTM D6140	gal/yd ² (l/m ²)	0.17	(0.8)
Glass by Weight		%	85	

PHYSICAL PROPERTIES	TEST METHOD	UNIT	TYPICAL VALUE
Mass/Unit Area	ASTM D5261	oz/yd ² (g/m ²)	16.6 (563)

		ROLL SIZE	
Roll Dimensions (width x length)	ft (m)	10 x 150 (1.9 x 94.1)	12.5 x 150 (3.8 x 45.7)
Roll Area	yd ² (m ²)	167 (140)	208 (174)
Estimated Roll Weight	lbs (kg)	228 (103)	269 (122)

¹Melting point for Fiberglass. Glass Filaments are incombustible



Distributed By:
Road Fabrics, Inc.
630-293-3111
info@roadfabrics.com
www.roadfabrics.com

365 South Holland Drive Pendergrass, GA 30567

Tel +1 706 693 2226 www.tencategeo.us



Solmax is not a design or engineering professional and has not performed any such design services to determine if Solmax's goods comply with any project plans or specifications, or with the application or use of Solmax's goods to any particular system, project, purpose, installation, or specification.
FGS000746 ETQR11

