


PETROMAT MPG 100

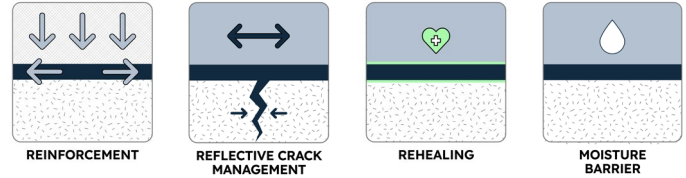

This is to certify that PETROMAT® MPG100 is a 100% polypropylene filament nonwoven fabric, reinforced by mechanically bonded bi-axial network of reinforcing glass filaments. PETROMAT MPG100 was especially developed for the rehabilitation of asphalt roads.

TenCate Geosynthetics Americas Laboratories are accredited by Geosynthetic Accreditation Institute – Laboratory Accreditation Program ([GAI-LAP](#)).

MECHANICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM AVERAGE ROLL VALUE
Tensile Strength @ 0°	ASTM D6637 Method A Modified	lbs/in (kN/m)	571 (100)
Tensile Strength @ 90°	ASTM D6637 Method A modified	lbs/in (kN/m)	571 (100)
Tensile Elongation	ASTM D6637 Method A modified	%	< 5

PHYSICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM TEST VALUE
Asphalt Retention	ASTM D6140	gal/yd ² (l/m ²)	0.27 (1.2)
Melting Point ¹	ASTM D276	F° (C°)	Glass filaments are incombustible and temperature resistant up to 1472° (800°)

			TYPICAL VALUE
Mass/Unit Area	ASTM D5261	oz/yd ² (g/m ²)	20.0 (678)

		ROLL SIZE
Roll Dimensions (width x length)	ft (m)	6.25 x300 (1.9 x 91) 12.5 x 150 (3.8 x 45.7)
Roll Area	yd ² (m ²)	208 (174)
Estimated Roll Weight	lbs (kg)	260 (169)

NOTES:

¹Melting point for Fiberglass. Glass Filaments are incombustible and temperature resistant at stated value.



Distributed By:
Road Fabrics, Inc.
630-293-3111
info@roadfabrics.com
www.roadfabrics.com

365 South Holland Drive Pendergrass, GA 30567

Tel +1 706 693 2226 www.tencategeo.us



Solmax is not a design or engineering professional and has not performed any such design services to determine if Solmax's goods comply with any project plans or specifications, or with the application or use of Solmax's goods to any particular system, project, purpose, installation, or specification.
FGS000647 ETQR16

